




IMPORTANT!


This manual provides all the necessary information for your SECUR product to be properly and safely installed. Please read all instructions before installation, and make sure you follow them carefully during the installation process. Failure to follow these instructions may result in **DAMAGE** to the product or vehicle, and/or **SERIOUS INJURY** to you and your passengers!

Product Code	ULTRA
Approval	R65 CLASS1
Voltage	10-30VDC
Current Consumption	MAX @0.75A
Flash Pattern	22
Working Tempature	-30°C~+50°C
Waterproof	IP67
Colors	A/W/R/B
LEDs	6
Lens Material	PC
Base	ALUMINUM

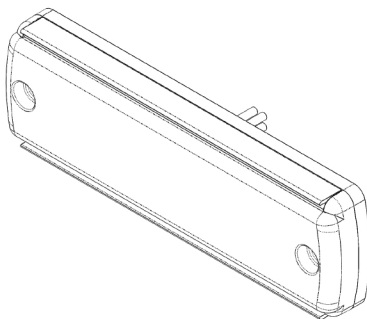

Warning!!!

If you need to drill holes for mounting this product, please be careful not to damage any vehicle components/parts during the process. Please check both sides of the mounting surface before drilling. After drilling, make sure you de-burr any holes and remove any remnants. Grommets are also required to be installed in all wire passage holes. Then, use a sealant as recommended by your vehicle manufacturer to seal any holes so as to make them air and watertight

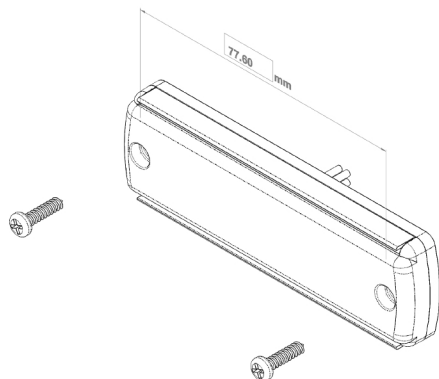

Warning!!!

All wires connecting to the POSITIVE (+) terminal of the battery must be able to carry at least 125% of the maximum operating current load and fused at the battery. Do not use any circuit breakers for this product.

Wiring

- Red: Positive (+) (with 2A fuse suggested)
- Purple*: positive (+) (with 2A fuse suggested)
- Black: Negative (-)
- Blue: Touch Black (-) to change pattern
- Less than 1 sec. for next pattern
- between 1 to 3 sec. for previous pattern
- more than 5 sec. to reset to default
- Blue: Connect to Blue on other modules to Sync**
- must set all modules to the same pattern prior to sync
- to activate alternate sync pattern, please set one of the module at patter ph1 and the other at ph2
- White: Connect to Black to Dim

*Only available on dual color module

**Must set all modules to the same pattern prior to sync

Warning!!!

This product must be properly grounded. Please connect the product's ground wire directly to the NEGATIVE (-) battery post. Inadequate grounding and/or shorting of electrical connections can cause high current arcing, which can result in injury and/or severe damage to your vehicle, including fire



www.premex.es
Tel.: 948 19 80 02 y 629 628 353
premer@navendi.com



PA1	ECE R65 SINGLE FLASH PH 1	PA12	SAE SINGLE FLASH PH ALT
PA2	ECE R65 SINGLE FLASH PH 2	PA13	SAE DOUBLE Flash PH1
PA3	ECE R65 SINGLE FLASH ALT	PA14	SAE DOUBLE Flash PH2
PA4	ECE R65 DOUBLE FLASH PH 1	PA15	SAE DOUBLE Flash ALT
PA5	ECE R65 DOUBLE FLASH PH 2	PA16	SAE Quad FLASH PH1
PA6	ECE R65 DOUBLE FLASH ALT	PA17	SAE Quad FLASH PH2
PA7	ECE R65 QUAD FLASH PH 1	PA18	SAE Quad FLASH ALT
PA8	ECE R65 QUAD FLASH PH 2	PA19	MODUL FLASH SIM
PA9	ECE R65 QUAD FLASH ALT	PA20	MODUL FLASH ALT
PA10	SAE SINGLE FLASH PH 1	PA21	STEADY BURN
PA11	SAE SINGLE FLASH PH 2	PA22	OFF

Connect the function wire to negative to trigger functions.

1 Second : to select next pattern	4 Second : back to default pattern (PA1)
2-3 Second : to select previous pattern	5 Second : to turn OFF

Warning!!!

This product is intended for use by authorized personnel only. The user is responsible for understanding and obeying all laws pertaining to warning signal devices. Therefore, he/she should identify all laws and regulations regulating the use of such devices and conform to them. The manufacturer assumes no liability for any loss resulting from the use of this product.

Warning!!!

This product contains either strobe light(s), halogen light(s), high-intensity LEDs or a combination of these lights. Do not stare directly into these lights as it may cause temporary blindness or even result in eye damage.

Warning!!!

Proper placement and installation of this product are vital for it to operate at its optimum efficiency. It is your responsibility to determine a suitable mounting location for the product so as to ensure the safety of all passengers onboard. Do not install this product or route any wires within the airbag deployment area of your vehicle as it may damage or reduce the effectiveness of the air bag. In worst-case scenario, it may even become a projectile that could cause serious injury or death. Before installation, please refer to the manual of your vehicle and avoid installing it within the airbag deployment area.

Warning!!!

Please use only soap and water to clean the outer lens. Do not use other chemicals as it may result in premature lens cracking (crazing) and discoloration that could reduce lens effectiveness in which you should replace the lens immediately. Also, please do not use a pressure washer to clean this product

Manufacturer Limited Warranty Policy: Manufacturer warrants that on the date of purchase this product. This Limited Warranty extends for Thirty Six (36) months from the date of purchase.

DAMAGE TO PARTS OR PRODUCTS RESULTING FROM TAMPERING, ACCIDENT, ABUSE, MISUSE, NEGLIGENCE, UNAPPROVED MODIFICATIONS, FIRE OR OTHER HAZARD; IMPROPER INSTALLATION OR OPERATION; OR NOT BEING MAINTAINED IN ACCORDANCE WITH THE MAINTENANCE PROCEDURES SET FORTH IN MANUFACTURER'S INSTALLATION AND OPERATING INSTRUCTIONS VOIDS THIS LIMITED WARRANTY.