



NOTE: Do not install and/or operate this product unless you have read and understand all the safety information and instructions contained in this manual.


IMPORTANT!

This manual provides all the necessary information for your product to be properly and safely installed. Please read all instructions before installation, and make sure you follow them carefully during the installation process. Failure to follow these instructions may result in **DAMAGE** to the product or vehicle, and/or **SERIOUS INJURY** to you and your passengers!


Features

- 12VDC Multi-Voltage Input
- 3 Independent tone control with additional Manual Tone Function
- Multi nation tone selection
- Public Address Capability (Optional)
- Sync-Capability

Product Code	SPR-030
Approval	R10
IP rating	Siren: IPx6
	Speaker: IPx4K
Input Voltage	12VDC
Siren Output Power	30 Watt Max
Impedance	4 ohms
Working Temperature	-30°C ~ +65°C
Dimension	113mm x 96mm x 105 mm

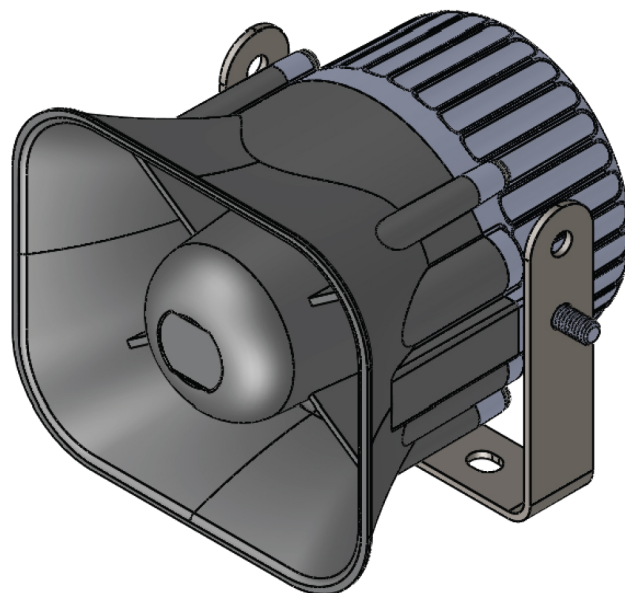

Installation

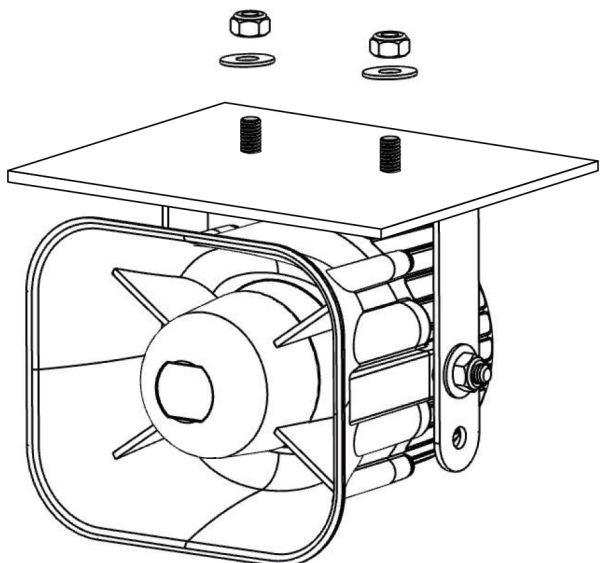

Wiring Diagram

Wires	Functions	Trigger
Red	Positive	NA
Black	Negative	NA
Purple	Tone 1*	+
Yellow	Tone 2*	+
White	Tone 3*	+
Green	Manual Tone*	+
Blue	Tone Change / Sync**	-

*: All tones set to be wail by default. You may select your desirable tone by connector the blue wire to negative momentarily to change the siren tone.

** : Connect the blue wire to another SPR-030 to synchronize the sirens. The two device must be set at the same functions and features in order to sync.